



Solid

SPC CATALOGUE



4 colors
Size: 9"x60" (1524 x 230mm)
Wear layer: 20 mil (0.5mm)
Thickness: 7.5mm
Embossed in Register

All colors



CONCRETE



BRICK



WOOD



IRON



CONCRETE

Concrete 9x60 20 mil





BRICK

Brick 9x60 20 mil





WOOD

Wood 9x60 20 mil





IRON


Iron 9x60 20 mil



Product Specifications

Width	Length	Thickness	Wear Layer
9"	60"	7.5mm	20 mil (0.5mm)
PC/Box	SQFT/Box	LBS/Box	
6	22.64	58.48	
Box/Pallet	SQFT/Pallet	LBS/Pallet	
48	1086.61	2814.85	

Moldings Available

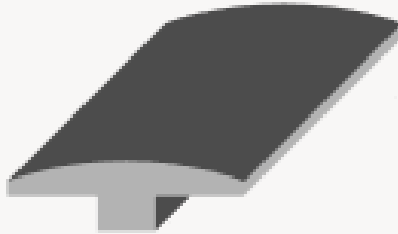

T-Molding



Reducer



Flush-Stairnose

Size: 9x60"
Thickness: 6mm+1.5mm EVA

Wear layer: 0.5mm (20 mil)
Texture: EIR (Embossed in Register)

Properties	Test Method	Result
Surface Treatment		UV Coating
Staining Resistance	ISO26987	Not affected
Resistance to Light	ASTM F1515	<8.0 ΔE
DCOF	ASTM D2047	DRY - 0.48
Thickness Swell	ASTM F3261	Commercial Class
Large Ball Impact Resistance	EN 16511	≥1200 mm
Heat Stability / Color Fastness	ASTM F1514-03	<8.0 ΔE
Critical Radiant Flux	EN 13501-1	Class Bfl - s1
Residual Indentation	ASTM F3261	Commercial Class
Surface Bonding	ASTM F3261	Commercial Class
Thermal resistance	EN 12667:2001	0.05 (m².K)/W
Dimensional Stability	ASTM F3261	Commercial Class
Impact Sound Conduction	ASTM E492-09/ ISO 12354	IIC= 64 dB
Airborne Sound Conduction	ASTM E90-09	STC = 66dB
Static Load Limit	ASTM F970-07	Commercial Class





Solid

SPC CATALOGUE