




Comfort

SPC CATALOGUE



7 colors
Size: 9"x60" (1524 x 228mm)
Wear layer: 12 mil (0.3mm)
Thickness: 5.5mm
Random Emboss

All colors

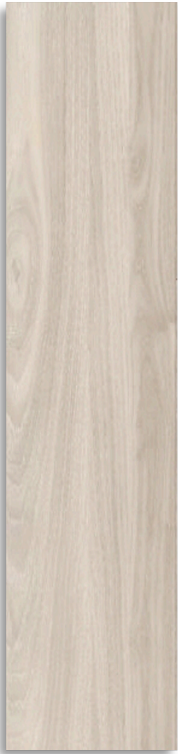

WHITE FOREST



SEQUOIA




ZION



GRAND CANYON



YOSEMITE

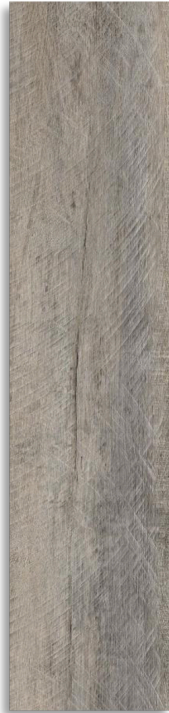

MONUMENT VALLEY



ACADIA



WHITE FOREST



SEQUOIA



ZION



GRAND CANYON



YOSEMITE



ACADIA




MONUMENT
VALLEY

Product Specifications

Width	Length	Thickness	Wear Layer
9"	60"	5.5mm	12 mil (0.3mm)
PC/Box	SQFT/Box	LBS/Box	
7	26.18	45.21	
Box/Pallet	SQFT/Pallet	LBS/Pallet	
56	1466.14	2631.20	

Moldings Available

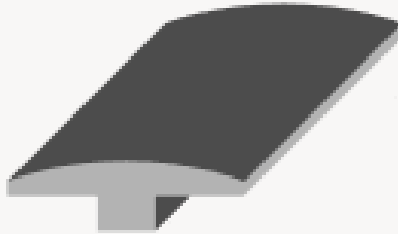

T-Molding



Reducer



Flush-Stairnose

Size: 9x60"

Wear layer: 0.3mm (12 mil)

Thickness: 4mm+1.5mm IXPE

Texture: Random Emboss

Properties	Standard	Result
Locking System	EN 16511 / ISO 24334	UNILIN
Installation Method	Click Installation	Uniclic
Surface Treatment		UV Coating
Staining Resistance	ASTM F925-13 / ISO 26987	Pass
Resistance to Light	ASTM F1700-18a Section 6.10 & ASTM F1515-03 (2008)	Pass (< 8.0 Delta E Requirement)
DCOF	ANSI A3263-2021	DRY – 0.45 WET – 0.35
Peel Strength	EN 431	Pass (at least 30N/25mm between upper layers with SPC core)
	EN 431	Pass (at least 4N / 50 mm between backing layer with SPC core)
Resistance to Fungi (EVA)	ASTM G21-15	Pass
Abrasion Resistance	ASTM 4060	Pass≥4500 circles
Heat Stability / Color Fastness	ASTM F1514-03	Pass
Residual Indentation	ASTM F1914	Pass
Formandehyde	EN 717-1:2004	E1
Thermal resistance	EN 12667:2001	Good
Toxicity	EN 71 (covers REACH' s chemical list : heavy metal and other concern chemicals)	Pass
VOCs	Floorscore	Good (Low priority)
Smoke Density	ASTM E662-2018	Pass (< 450)
Impact Resistance	ASTM F1265-03a	Pass
Reaction to Fire	ASTM E 648 -2019a	Class 1
IIC	ASTM E492-09 / 2016	IIC= 69 Db
STC	ASTM E90-09 – 2016	STC = 68 dB
Residual Indentation	ASTM F1914 / EN 433	Pass
Recycling		Suitable



Fire-Proof



Water Proof



VOC-Free



High Strength



Zero Shrinkage



Anti Slipping



Sound Proof



Anti Bacterial



Easy Installation



Comfort

SPC CATALOGUE